



## DESCRIPTION

Ashlar Face Veneer is taller than Ledgerstone veneer with a roughly rectangular shape. Its face shows that the stone has been split apart, revealing the vibrant and more varied colors of the inside grain of the stone. Oyster Bay™ is a natural, thin cut stone consisting of deep grays, blue, black, and white with subtle hits of beige. Sold as individual stones not stone panels.

## DIMENSIONS

**Height:** 3–7 inches  
**Length:** 4–14 inches  
**Thickness:** 1 inch +/- 1/4 inch  
**Weight:** Less than 14 lbs per SF

## PACKAGING

**Flat Crate:** 168 SF (SKU# VTABFW)  
**Flat Box:** 5 SF (SKU# VTABFS)  
**Corner Crate:** 150 LF (SKU# VTABCW)  
**Corner 1/2 Crate:** 75 LF (SKU# VTABCH)  
**Corner Box:** 5 LF (SKU# VTABCS)


## PROFILE

**Colors:** Black, gray, blue, beige, and white  
**Finish:** Split, textured face



## APPLICATIONS

This product is HCA (Harsh Climate Approved). It has been subjected to numerous freeze-thaw cycles and can withstand the harshest hot, cold, or wet climates. Perfect for interior and exterior use in all regions including applications below grade. Suitable for use near salt water, water features, and in areas where blowing sand is a concern. [www.stoneyard.com/hca](http://www.stoneyard.com/hca)

## FLAT DETAIL

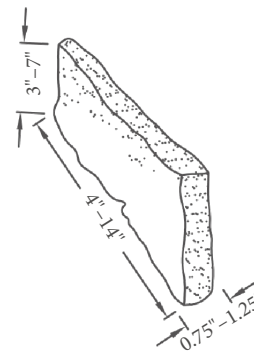

## CORNER DETAIL

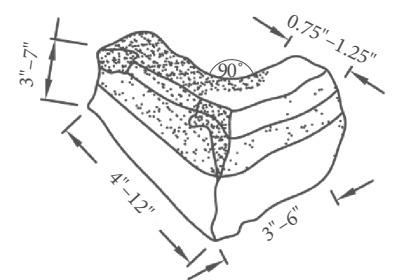

## INSTALLATION

Thin Veneer installation information is available on our website [www.stoneyard.com/install](http://www.stoneyard.com/install). A mock-up is recommended to help in all design decisions including grout color, joint size (dry-laid, standard, or wide), and desired finish. [www.stoneyard.com/mortar](http://www.stoneyard.com/mortar)

## LEED® CERTIFICATION & ENERGY EFFICIENCY

Whether it's for a commercial building or historical restoration, this natural building material can assist with the LEED certification. Functionally, stone will retain heat in the winter and cold in the summer, enhancing energy efficiency. [www.stoneyard.com/architect](http://www.stoneyard.com/architect)

## CORNERS

Matching 90° corners are available in all colors and shapes. When other angles are needed, the installation options are weaving (alternating flats) or miter cutting flat pieces to wrap the corner. [www.stoneyard.com/corner](http://www.stoneyard.com/corner)

Natural stone varies in color, veining, and pattern from piece to piece. STONEYARD® is not responsible for photos used in color literature, on websites, or in emails to accurately reflect actual material. Photos are used to create a general idea or feel for the material and cannot be used for color matching.



## DESCRIPTION

Oyster Bay™ is a natural, thin cut stone consisting of deep grays, blues, blacks, and whites. The Ledgestone pattern of stone veneer consists of thin strips of natural stone for cladding. Stacked, dry, jointed, or over-grout looks available from installation technique chosen by the installer. Sold as individual stones not stone panels.

## DIMENSIONS

**Height:** 1–4 inches

**Length:** 4–12 inches

**Thickness:** 1 inch +/- 1/4 inch

**Weight:** Less than 14 lbs per SF

## PACKAGING

**Flat Crate:** 168 SF (SKU# VTLBFW)

**Flat Box:** 5 SF (SKU# VTLBFS)

**Corner Crate:** 150 LF (SKU# VTLBCW)

**Corner 1/2 Crate:** 75 LF (SKU# VTLBCH)

**Corner Box:** 5 LF (SKU# VTLBCS)

## PROFILE


**Colors:** Black, gray, blue, and white

**Finish:** Split, textured face



## APPLICATIONS

This product is HCA (Harsh Climate Approved). It has been subjected to numerous freeze-thaw cycles and can withstand the harshest hot, cold, or wet climates. Perfect for interior and exterior use in all regions including applications below grade. Suitable for use near salt water, water features, and in areas where blowing sand is a concern. [www.stoneyard.com/hca](http://www.stoneyard.com/hca)

## FLAT DETAIL



## CORNER DETAIL

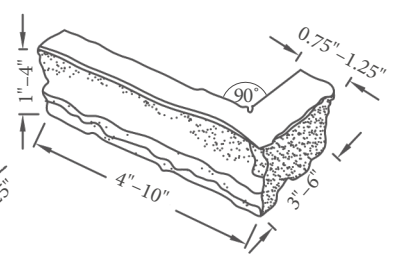

## INSTALLATION

Thin Veneer installation information is available on our website [www.stoneyard.com/install](http://www.stoneyard.com/install). A mock-up is recommended to help in all design decisions including grout color, joint size (dry-laid, standard, or wide), and desired finish.

[www.stoneyard.com/mortar](http://www.stoneyard.com/mortar)

## LEED® CERTIFICATION & ENERGY EFFICIENCY

Whether it's for a commercial building or historical restoration, this natural building material can assist with the LEED certification. Functionally, stone will retain heat in the winter and cold in the summer, enhancing energy efficiency.

[www.stoneyard.com/architect](http://www.stoneyard.com/architect)

## CORNERS

Matching 90° corners are available in all colors and shapes. When other angles are needed, the installation options are weaving (alternating flats) or miter cutting flat pieces to wrap the corner. [www.stoneyard.com/corner](http://www.stoneyard.com/corner)

Natural stone varies in color, veining, and pattern from piece to piece. STONEYARD® is not responsible for photos used in color literature, on websites, or in emails to accurately reflect actual material. Photos are used to create a general idea or feel for the material and cannot be used for color matching.



## DESCRIPTION

Oyster Bay™ is a natural, thin cut stone consisting of deep grays, blue, black, white, and a sprinkle of tan. Mosaic pattern stone veneer consists of irregular pieces of natural stone for siding, facing, and cladding. The shapes consist primarily of triangles and stop signs, similar to the mosaic dimensions created from broken ice. Sold as individual stones not stone panels.

## DIMENSIONS

**Facing Area:** 0.25–1.25 SF

**Size Range:** (4.5 inches x 8 inches) to (11 inches x 16 inches)

**Thickness:** 1 inch +/- 1/4 inch

**Weight:** Less than 14 lbs per SF

## PACKAGING

**Flat Crate:** 168 SF (SKU# VTMBFW)

**Flat Box:** 5 SF (SKU# VTMBFS)

**Corner Crate:** 150 LF (SKU# VTMBCW)

**Corner 1/2 Crate:** 75 LF (SKU# VTMBCH)

**Corner Box:** 5 LF (SKU# VTMBCS)

## PROFILE


**Colors:** Black, gray, blue, beige, and white

**Finish:** Natural, aged face



## APPLICATIONS

This product is HCA (Harsh Climate Approved). It has been subjected to numerous freeze-thaw cycles and can withstand the harshest hot, cold, or wet climates. Perfect for interior and exterior use in all regions including applications below grade. Suitable for use near salt water, water features, and in areas where blowing sand is a concern. [www.stoneyard.com/hca](http://www.stoneyard.com/hca)

## FLAT DETAIL

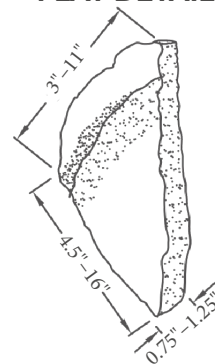

## CORNER DETAIL

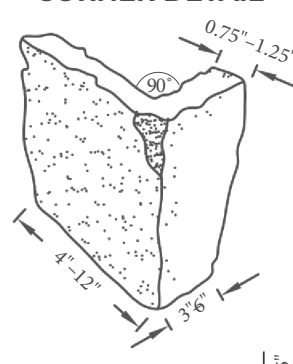

Plan View

## INSTALLATION

Thin Veneer installation information is available on our website [www.stoneyard.com/install](http://www.stoneyard.com/install). A mock-up is recommended to help in all design decisions including grout color, joint size (dry-laid, standard, or wide), and desired finish. [www.stoneyard.com/mortar](http://www.stoneyard.com/mortar)

## LEED® CERTIFICATION & ENERGY EFFICIENCY

Whether it's for a commercial building or historical restoration, this natural building material can assist with the LEED certification. Functionally, stone will retain heat in the winter and cold in the summer, enhancing energy efficiency. [www.stoneyard.com/architect](http://www.stoneyard.com/architect)

## CORNERS

Matching 90° corners are available in all colors and shapes. When other angles are needed, the installation options are weaving (alternating flats) or miter cutting flat pieces to wrap the corner. [www.stoneyard.com/corner](http://www.stoneyard.com/corner)

Natural stone varies in color, veining, and pattern from piece to piece. STONEYARD® is not responsible for photos used in color literature, on websites, or in emails to accurately reflect actual material. Photos are used to create a general idea or feel for the material and cannot be used for color matching.



## DESCRIPTION

Oyster Bay™ is a natural, thin cut stone consisting of deep grays, blue, black, and white with subtle hits of beige. Pieces are roughly square and roughly rectangular in shape. Sold as individual stones not stone panels.

## DIMENSIONS

**Facing Area:** 0.25–1.25 SF

**Size Range:** (4.5 inches x 8 inches) to (11 inches x 16 inches)

**Thickness:** 1 inch +/- 1/4 inch

**Weight:** Less than 14 lbs per SF

## PACKAGING

**Flat Crate:** 168 SF (SKU# VTRBFW)

**Flat Box:** 5 SF (SKU# VTRBFS)

**Corner Crate:** 150 LF (SKU# VTRBCW)

**Corner 1/2 Crate:** 75 LF (SKU# VTRBCH)

**Corner Box:** 5 LF (SKU# VTRBCS)

## PROFILE


**Colors:** Black, gray, blue, beige, and white

**Finish:** Natural, aged face


## APPLICATIONS

This product is HCA (Harsh Climate Approved). It has been subjected to numerous freeze-thaw cycles and can withstand the harshest hot, cold, or wet climates. Perfect for interior and exterior use in all regions including applications below grade. Suitable for use near salt water, water features, and in areas where blowing sand is a concern. [www.stoneyard.com/hca](http://www.stoneyard.com/hca)

## FLAT DETAIL



## CORNER DETAIL



Plan View

## INSTALLATION

Thin Veneer installation information is available on our website [www.stoneyard.com/install](http://www.stoneyard.com/install). A mock-up is recommended to help in all design decisions including grout color, joint size (dry-laid, standard, or wide), and desired finish. [www.stoneyard.com/mortar](http://www.stoneyard.com/mortar)

## LEED® CERTIFICATION & ENERGY EFFICIENCY

Whether it's for a commercial building or historical restoration, this natural building material can assist with the LEED certification. Functionally, stone will retain heat in the winter and cold in the summer, enhancing energy efficiency. [www.stoneyard.com/architect](http://www.stoneyard.com/architect)

## CORNERS

Matching 90° corners are available in all colors and shapes. When other angles are needed, the installation options are weaving (alternating flats) or miter cutting flat pieces to wrap the corner. [www.stoneyard.com/corner](http://www.stoneyard.com/corner)

Natural stone varies in color, veining, and pattern from piece to piece. STONEYARD® is not responsible for photos used in color literature, on websites, or in emails to accurately reflect actual material. Photos are used to create a general idea or feel for the material and cannot be used for color matching.